

CFd® DownSpray

The patented C-Frame DownSpray is a 360° spray jet that distributes water evenly across the wetted area, encouraging full root growth by delivering water and fertiliser over a larger surface.

Features

- 45° down-spray pattern provides consistent diameter across varying inlet pressures, making the CFd® ideal for pot watering
- ON/OFF quick shut-off clip
- Engineered tubing for maximum durability and flexibility in rugged environments
- Plant stem protection
- Slimline stake to minimise root damage
- Self-piercing adaptor for quick, easy installation into lateral tubing
- Adjustable diameter by raising or lowering stake height
- Six colour-coded nozzles for easy flow rate identification
- “Quick” thread inlet with sealing barbs
- UV stabilised for long life




Applications

Nurseries, tree lots, pot plants, home and landscaped gardens.

Performance Chart

Pattern		360°	
Nozzle Size & Colour	Pressure (kPa)	Flow (lph)	Diameter (m) at 250 mm Riser height
0.8 mm Black	50	16	0.6
	100	22	0.6
	150	27	0.5
	200	31	0.5
0.9 mm Brown	50	20	0.6
	100	28	0.5
	150	35	0.5
	200	41	0.5
1.0 mm Blue	50	24	0.6
	100	33	0.5
	150	41	0.5
	200	47	0.5
1.1 mm Grey	50	31	0.6
	100	44	0.6
	150	54	0.5
	200	63	0.5
1.5 mm Red	50	51	0.6
	100	73	0.6
	150	90	0.5
	200	104	0.5
2.1 mm Purple	50	96	0.6
	100	136	0.6
	150	165	0.5
	200	190	0.5

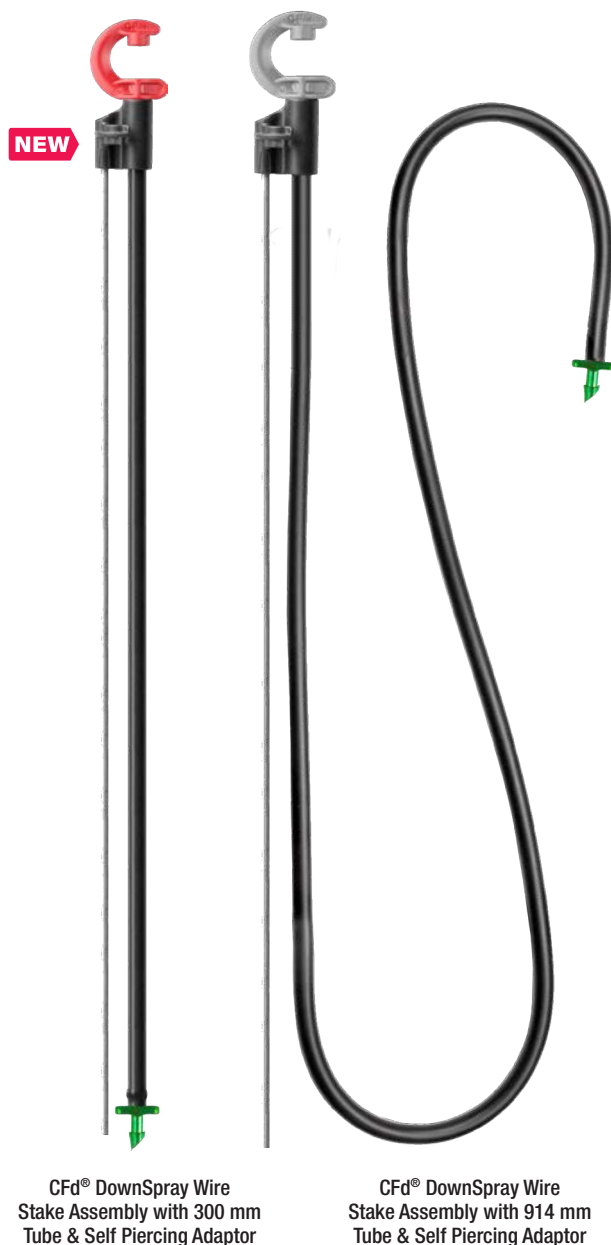

Ordering Information - CFd® DownSpray

Nozzle Size & Colour	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
0.8 mm Black	19005	100	90	14.4
0.9 mm Brown	19025	100	90	14.4
1.0 mm Blue	19015	100	90	14.4
1.1 mm Grey	19045	100	90	14.4
1.5 mm Red	19055	100	90	14.4
2.1 mm Purple	19065	100	90	14.4

Ordering Information - CFd® Galvanised Rod Wire Stake Assembly

Nozzle Size & Colour	Tube Length	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
0.8 mm Black	300 mm	44205	25	TBA	TBA
0.9 mm Brown	300 mm	44215	25	TBA	TBA
1.0 mm Blue	300 mm	44225	25	TBA	TBA
1.1 mm Grey	300 mm	44235	25	TBA	TBA
1.5 mm Red	300 mm	44245	25	TBA	TBA
2.1 mm Purple	300 mm	44255	25	TBA	TBA
0.8 mm Black	914 mm	43705	25	12	9.7
0.9 mm Brown	914 mm	43725	25	12	9.7
1.0 mm Blue	914 mm	43715	25	12	9.7
1.1 mm Grey	914 mm	43745	25	12	9.7
1.5 mm Red	914 mm	43755	25	12	9.7
2.1 mm Purple	914 mm	43765	25	12	9.7

Ordering Information - Galvanised Rod Wire Stake Assembly

Type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
Galvanised Wire Stake Assembly 300mm Rod w/ 300mm Tube & Adaptor	43815	25	TBA	TBA
Galvanised Wire Stake Assembly 300mm Rod w/ 914mm Tube & Adaptor	43735	25	12	9.2

Ordering Information - CFd® DownSpray Asta® Stake Assembly

Nozzle Size & Colour	Tube Length	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
1.0 mm Blue	300 mm	17515	25	16	11.1
1.0 mm Blue	914 mm	17615	25	10	8.5

Specifications

	CFD® DownSpray	CFD® Wire Stake Assembly	CFd® Asta® Stake Assembly
UV STABILISED MATERIAL	FRAME STAKE OFF-TAKE TUBE BARB ADAPTOR STAKE	acetal polypropylene PEVA acetal galvanised steel	acetal acetal PVC acetal polypropylene



Scan to
see how
it works



CFd® DownSpray Range

