

KwikAdapt™

Professional Quality

KwikAdapt™ fittings provide a quick and reliable way to connect Polyethylene Pipe to Swing/Drip tubing with a single-piece design.

Features

- The barb and spike combination keeps connections secure, even under pressure surges.
- Easy, fast installation.
- Universal thread sizes for versatile use.
- Strong barb & spike design ensures stability.
- Compatible with traditional funny pipe & 13 mm ID tube



Applications

Compatible with KwikTap™ Saddles for swing/drip connections.




*Refer to pages 60 & 65 for KwikTap™ compatible directors

Ordering Information - Swing Elbows

Description	Part Number	Pack Quantity	Units Per Carton
1/2" MPT KwikAdapt™ Swing Elbow Orange	SW1413-073	50	20
3/4" MPT KwikAdapt™ Swing Elbow Grey	SW1413-099	50	30

Ordering Information - Swing Adaptors

Description	Part Number	Pack Quantity	Units Per Carton
1/2" MPT KwikAdapt™ Swing Straight Orange	SW1436-073	50	20
3/4" MPT KwikAdapt™ Swing Straight Grey	SW1436-099	50	20



Swing Adaptor
1/2" MPT



Swing Adaptor
3/4" MPT



Swing Elbow
1/2" MPT



Swing Elbow
3/4" MPT



KwikTap™

Professional Quality


Saddles


KwikTap™ Saddle Tees offer a tool-free, clamp-free self tapping solution for connecting to PE Pipe (PE 80/ PE 100).


Features

- Fast, Simple, Secure Installation
- No bolts, washers, nuts to lose or o-rings to perish
- No drilling required
- Installs in under 10 seconds
- Durable construction with reinforced nylon top and ABS base
- Compatible with swing fittings and traditional articulated risers
- Available in 1/2" and 3/4" outlet options


Installing KwikTap™ Saddles

- 

Simply open the saddle and snap it onto the pipe.
- 

While holding components in position, place the tap onto the saddle.
- 

Screw the tap onto the ratcheting lock until it can no longer turn.

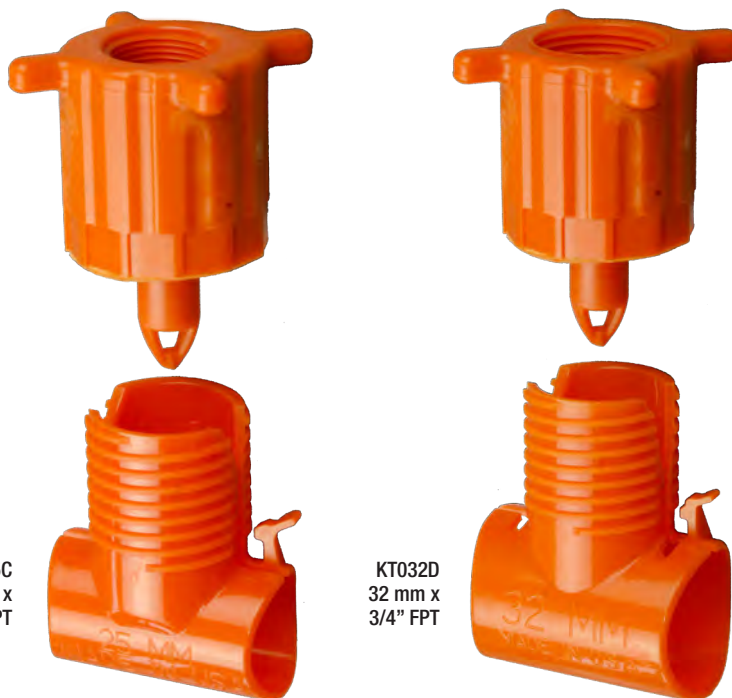

Ordering Information - KwikTap™ Saddles

Description	Part Number	Pack Quantity	Units Per Carton
25 mm PE x 1/2" FPT	KT025C	10	200
25 mm PE x 3/4" FPT	KT025D	10	200
32 mm PE x 1/2" FPT	KT032C	10	200
32 mm PE x 3/4" FPT	KT032D	10	200

- Suitable for PN8 - PN16 (irrigation only)
- Not suitable for mains prior to master valve

Performance Chart

Flow Rate	Quick Burst Test
51.48 lpm @ 275 kPa	2702 kPa @ 62 seconds - The KwikTap™ fitting did not fail

Applications

Rotors, spray bodies, swing/drip connections & traditional articulated risers

