

Take-Off Fittings 25 mm


A secure and proven method for connecting 25 mm I.D. LDPE to sub-main lines.

Features

- Cost-effective alternative to traditional saddles or tapping bands
- Curved double-flanged take-off grommet for enhanced sealing
- Reduces installation time and labour costs
- Suitable for use with PE and PVC
- 28 mm inlet × 25 mm take-off
- Use a precision 33 mm drill bit to create clean, correctly sized holes for reliable sealing
- PE & PVC compatible




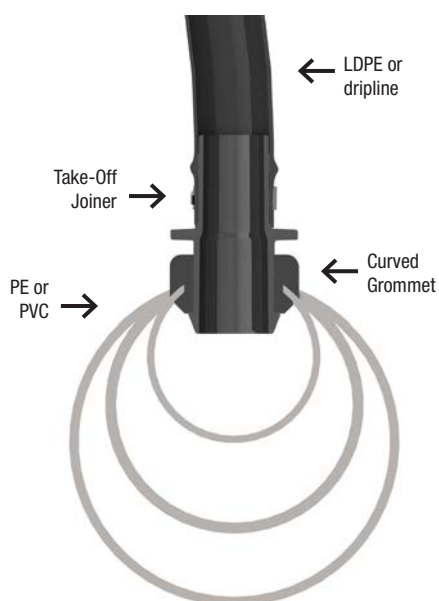


Applications

Connecting LDPE or dripline to PE or PVC sub-main **Accessories:** Stainless Steel Clamp



Ordering Information - Take-Off 25 mm Fittings

Type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
Take-Off Joiner & Grommet Set	46465	25	8	TBA
Curved Grommet 25 mm	46445	100	7	TBA
Drill Bit 33 mm	51875	1	36	TBA

Take-Off Joiner	Min. ID (PE or PVC)	Min. Wall Thickness (PE or PVC)	Max. Wall Thickness (PE or PVC)	Curved Grommet	Hole Size Drill Bit
					
Take-Off 28 mm x 25 mm	50 mm	2.2 mm	4.0 mm	28 mm	33 mm



33 mm Drill Bit



Take-Off Joiner & Curved Grommet Set 25 mm