

CFa AgSpray[™]

Performance Chart

Pattern/Trajectory	360° x 12 Streams - Hi Lo 26° High x 12.5° Low Trajectory Tested at 0.2 m above ground						
Nozzle Size	Pressure	Flow	Diameter - (m)		Hydraulic Flow Data		
& Colour	(kPa)	(lph)	High	Low	Constant (k)	Exponent (x)	
	50	16	2.6	2.0		0.49	
0.8 mm	100	22	3.5	2.8			
	150	27	4.2	3.4	2.382		
Black	200	31	4.8	3.9			
	250	35	5.3	4.4			
	50	20	3.1	2.3		0.52	
0.0	100	28	4.1	3.1			
0.9 mm	150	35	4.8	3.8	2.593		
Brown	200	41	5.3	4.4			
	250	46	5.8	4.9			
	50	24	3.4	2.4	3.583	0.49	
1.0 mm	100	33	4.2	3.4			
	150	41	4.8	4.1			
Blue	200	47	5.3	4.7			
	250	52	5.6	5.2			
	50	31	4.1	3.2		0.51	
4.4	100	44	5.3	4.2			
1.1 mm	150	54	6.0	4.9	4.246		
Grey	200	63	6.6	5.5			
	250	70	7.2	6.0			
	50	51	5.5	4.3		0.52	
1.5 mm	100	73	6.9	5.6			
	150	90	7.9	6.5	6.807		
Red	200	104	8.8	7.3			
	250	117	9.4	8.0			
	50	96	6.2	5.4		0.50	
0.4	100	136	8.4	7.4			
2.1 mm	150	165	9.8	8.6	13.735		
Purple	200	190	11.0	9.0			
	250	215	12.0	9.2			

Ordering Information - CFa AgSpray™

	Nozzle Size & Colour	Order Code	Pack Quantity	Packs per Carton	Carton (kg)
	0.8 mm Black	13005	100	90	15.0
	0.9 mm Brown	13075	100	90	15.0
	1.0 mm Blue	13015	100	90	15.0
	1.1 mm Grey	13065	100	90	15.0
	1.5 mm Red	13055	100	90	15.0
IEW	2.1 mm Purple	13085	100	90	15.0

Ordering Information - CFa AgSpray™ Stake Assembly with 600 mm Tube & Adaptor

	Nozzle Size & Colour	Order Code	Pack Quantity	Packs per Carton	Carton (kg)
	0.8 mm Black	41605	25	5	6.9
	0.9 mm Brown	41675	25	5	6.9
	1.0 mm Blue	41615	25	5	6.9
	1.1 mm Grey	41665	25	5	6.9
	1.5 mm Red	41655	25	5	6.9
٧	2.1 mm Purple	41685	25	5	6.9

Specifications

Dimensions		UV Stabilised Material	Base/Connection Type		
HEIGHT	34 mm				
WIDTH	25 mm	acetal	INLET	'Quick' thread with	
DEPTH	8 mm	acetai		sealing barb 4 mm	
WEIGHT (approx.)	1.4 g				

Ref : CFa_METRIC 210322

Antelco Australia
Antelco Pty Ltd ABN 50 008 062 708
Sales & Marketing, Orders & Warehouse
Research & Development
PO Box 95, 131 Tolley Rd,
St Agnes SA 5097 Australia
+61 8 8334 4333
adelaide@antelco.com.au

Antelco USA
Antelco Corporation
Sales & Marketing, Orders & Warehouse
886 Waterway PI,
Longwood,
Florida 32750 USA
+1 407 331 0699
info@antelco.com

Antelco Europe
Antelco UK Limited
Sales & Marketing, Orders & Warehouse
17a Chartmoor Rd,
Leighton Buzzard,
Bedfordshire LU7 4WG UK
+44 152 585 9990
orders@antelco.co.uk




CFa AgSpray[™]

Made in Australia

www.antelco.com

CFa AgSpray[™]



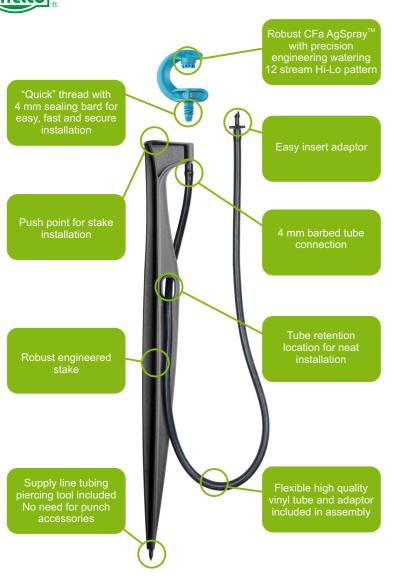

The next generation of Agricultural irrigation systems, the CFa AgSpray™ is a single piece 360° 12 stream open spray jet engineered for high performance.

The CFa AgSpray™ has a robust C-Frame with no moving parts and is designed for long life in harsh conditions.

The CFa AgSpray™ features a precision engineered 12 stream 360° Hi-Lo watering pattern. The high stream pattern has a trajectory of 26° while the low stream has a trajectory of 12.5°.

Features

- ☑ Colour coded for flow rate identification
- 12 stream Hi-Lo watering pattern
- Robust proven C-Frame design
- ✓ No moving parts
- ☑ "Quick" thread inlet with sealing barbs

Recommendations

☑ Pair with Antelco Asta® Stakes, Rigid Risers or Micro Stakes for a complete watering solution

Applications


Specifically designed for orchards and horticultural





CFa AgSpray[™] Stake Assembly **Features** installation.

- Pre-assembled to save time and money on
- Assembled on Micro Stake with 600 mm tube and adaptor.



CFa AgSpray[™]

Features

· 6 colour coded flow rates for easy identification.





