

Mini Bubbler Adjustable Flow

Made in Australia antelco.com

Mini Bubbler Spike Inlet 4 mm w/

Break Off

Adaptor



Mini Bubbler **Adjustable Flow**

High volume output with gentle umbrella pattern. Flow and coverage can be altered by rotating the click indexed cap.

Features

- Fingertip flow control with shut-off option.
- · Spike model to anchor Mini Bubbler at the plant.
- · Barb model for direct attachment to micro supply tubing.
- 4 mm threaded model for installation into Rigid Risers and Asta® Stakes.
- 1/2" threaded model for riser pipe installations.

Mini Bubbler Barb 4 mm Mini Bubbler Thread 4 mm


Mini Bubbler

Thread 1/2" Female

Performance Chart - Fully open (approx. 22 clicks)

Pattern		360⁰ ●	
Pressure (kPa)	Flow (lph)	Diameter (m)	
100	75	0.2	
150	95	0.3	
200	110	0.5	

Flow rate

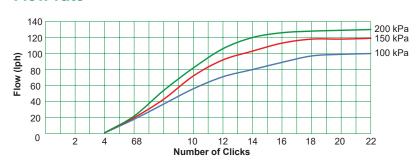

Ordering Information - Mini Bubbler

Base type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
Barb 4 mm	31745	100	65	11.0
Thread 4 mm	31715	100	65	13.8
Thread 1/2" FNPT	31725	25	70	8.2
Spike	31795	25	40	6.3

Specifications

	Barb	Thread	Thread 1/2"	Spike
UV STABILISED BASE MATERIAL CAP	polypropylene polypropylene	acetal polypropylene	polypropylene polypropylene	polypropylene polypropylene
BASE/CONNECTION TYPE: INLET	barb 4 mm	thread 4 mm 10-32 UNF	thread 1/2" FNPT	barb 4 mm





Scan to see how it works

Applications

Street trees and shrubs. Higher flow rates allow for short watering times.