



Agri Drip™ Pressure Compensating Drippers



A sealed turbulent flow path pressure compensating dripper incorporating a diaphragm that maintains a uniform flow rate over a wide range of operating pressures.

Features

- Three models: 2 lph, 4 lph & 8 lph.
- Positive barb connection to suit 4 mm ID tube or connect directly to supply tubing.
- UV stabilised materials for long life.
- Resistant to common agricultural chemicals & fertilisers.

Applications

Horticultural tree and row crops, vineyards and landscape.

DRIPPERS

PRESSURE COMPENSATING

Performance Chart

Pressure (kPa)	Flow (lph)		
	2 lph	4 lph	8 lph
50	1.7	2.8	7.3
100	2.0	3.9	8.1
150	2.1	4.1	8.4
200	2.1	4.3	8.6
250	2.1	4.4	8.6
300	2.1	4.5	8.3
350	2.1	4.5	7.6
MINIMUM FLOW PATH DIMENSION (mm)	0.7 x 0.6	0.8 x 0.8	0.7 x 1.0



Agri Drip™ 2 lph
PC Dripper
Barb 4 mm




Agri Drip™ 4 lph
PC Dripper
Barb 4 mm



Agri Drip™ 8 lph
PC Dripper
Barb 4 mm

Flow Rate

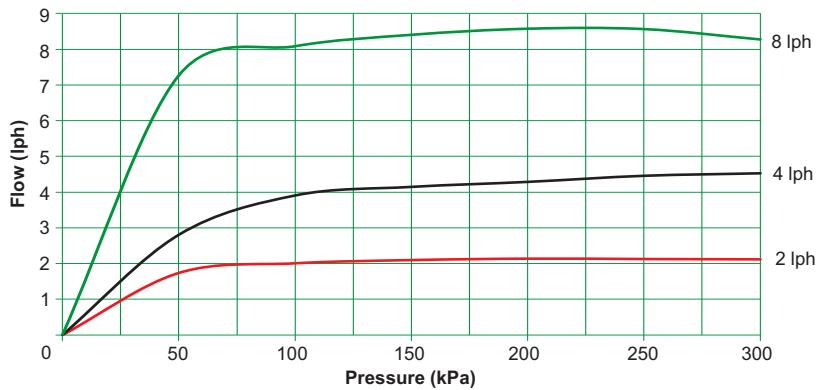

Ordering Information - Agri Drip™ PC

Flow	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
2 lph	30325	100	75	10.6
4 lph	30345	100	75	10.6
8 lph	30365	100	75	10.6

Specifications

Dimensions Assembled		UV Stabilised Material		Base/Connection Type	
HEIGHT	23 mm	BASE	polypropylene	INLET	barb 4 mm
DIAMETER	20 mm	CAP	polypropylene	OUTLET	spout 4 mm
WEIGHT (approx.)	1.3 g	DIAPHRAGM	silicone rubber		