

Xpando® Take-Off Fittings



Antelco Xpando® Take-Off Adaptors are an improved method of connecting low pressure irrigation tubes and drip lines from HDPE and uPVC pipes and sub mains with a Capo® Grommet.

Features

- Easy to install, reducing both time and cost of installation.
- Innovative Xpando® Take-Off Adaptor with collapsible barb prevents pullout and reduces grommet damage during the installation process.
- Capo® Grommet with internal step combines with Xpando® interference barb to hold off-take firmly in place.
- UV stabilised materials for long life.

Applications

Agricultural, horticultural, vineyard and landscape applications.

Ordering Information - Xpando® Take-Off Adaptors

Type	Order Code	Pack Quantity	Packs per Carton	Carton (kg)
Xpando® 10 mm inlet x 13 mm Take-Off	45715	25	65	8.9
Xpando® 10 mm inlet x 14 mm Take-Off (16 OD)	45875	25	65	9.8
Xpando® 10 mm inlet x 15 mm Take-Off (17 OD)	45885	25	56	9.2
Xpando® 13 mm inlet x 13 mm Take-Off	45605	25	60	8.7
Xpando® 13 mm inlet x 14 mm Take-Off (16 OD)	45595	25	60	9.6
Xpando® 13 mm inlet x 15 mm Take-Off (17 OD)	45615	25	48	8.2
Xpando® 16 mm inlet x 16 mm Take-Off (18 OD)	45635	25	35	8.8
Xpando® 16 mm inlet x 18 mm Take-Off (20 OD)	45585	25	32	8.3
Xpando® 19 mm inlet x 18 mm Take-Off (20 OD)	45995	25	26	8.4
Xpando® 19 mm inlet x 19 mm Take-Off	45665	25	26	9.0
Xpando® 19 mm inlet x 21 mm Take-Off (23 OD)	45675	25	24	9.3
Xpando® 19 mm inlet x 25 mm Take-Off (27 OD)	45685	25	18	8.0



Xpando® Take-Off Adaptor



Capo® Rubber Grommet



Drill Bit for Xpando®


Ordering Information - Capo® Rubber Grommets

Type	Order Code	Pack Quantity	Packs per Carton	Carton (kg)
Capo® Rubber Grommet 10 mm	45725	100	40	12.7
Capo® Rubber Grommet 13 mm	45735	100	40	10.5
Capo® Rubber Grommet 16 mm	45745	100	24	10.8
Capo® Rubber Grommet 19 mm	45755	100	18	10.4

Ordering Information - Xpando® Drill Bits

Type	Order Code	Pack Quantity	Packs per Carton	Carton (kg)
14 mm Drill Bit for 10 mm Xpando®	51835	1	36	1.8
16 mm Drill Bit for 13 mm Xpando®	51845	1	36	2.2
19 mm Drill Bit for 16 mm Xpando®	51855	1	36	2.7
22 mm Drill Bit for 19 mm Xpando®	51865	1	36	3.6

Interference between inlet barb and grommet causes grommet to expand and seal creating a leak proof connection

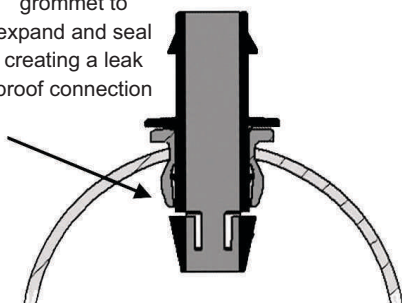

Xpando® Take -Off Adaptor	Min. ID	Min. Wall Thickness	Max. Wall Thickness	Capo® Grommet	Hole Size Grommet
Xpando® 10 mm x 13 mm	25 mm	1.5 mm	3.6 mm	10 mm (curved)	14 mm
Xpando® 10 mm x 14 mm					
Xpando® 10 mm x 15 mm					
Xpando® 13 mm x 13 mm	40 mm	1.5 mm	2.3 mm	13 mm	16 mm
Xpando® 13 mm x 14 mm					
Xpando® 13 mm x 15 mm					
Xpando® 16 mm x 16 mm	50 mm	1.5 mm	3.6 mm	16 mm	19 mm
Xpando® 16 mm x 18 mm					
Xpando® 19 mm x 18 mm	50 mm	1.5 mm	6.0 mm	19 mm	22 mm
Xpando® 19 mm x 19 mm					
Xpando® 19 mm x 21 mm					
Xpando® 19 mm x 25 mm					