



Xpando® Take-Off Director



Threaded Xpando® Take-Off Directors allow direct connection of threaded sprinkler risers to rigid sprinkler lateral pipework.

Features

- Proven Xpando® positive seal proof connection.
- 1/2" BSPM thread connection for riser.
- Large 19 mm Take-Off reduces friction losses.
- Uses standard CAPO® rubber grommets.
- Uses standard recommended 22 mm drill bit for installation.

Applications

Lateral Take-Off fitting for sprinkler riser installations. Is a more economical method than the traditional tapping saddle method.

FITTINGS

Ordering Information - Xpando® Director

Type	Order Code	Pack Quantity	Packs per Carton	Carton (kg)
Xpando® Director 1/2" BSPM x 19 mm Take-Off	45985	20	20	10.1
Capo® Rubber Grommet 19 mm	45755	100	18	10.4
22 mm Drill Bit for 19 mm Xpando®	51865	1	36	3.6




Xpando® Take-Off Director
1/2" BSPM x 19 mm



Capo® Rubber Grommet 19 mm



22 mm Drill Bit for 19 mm Xpando®

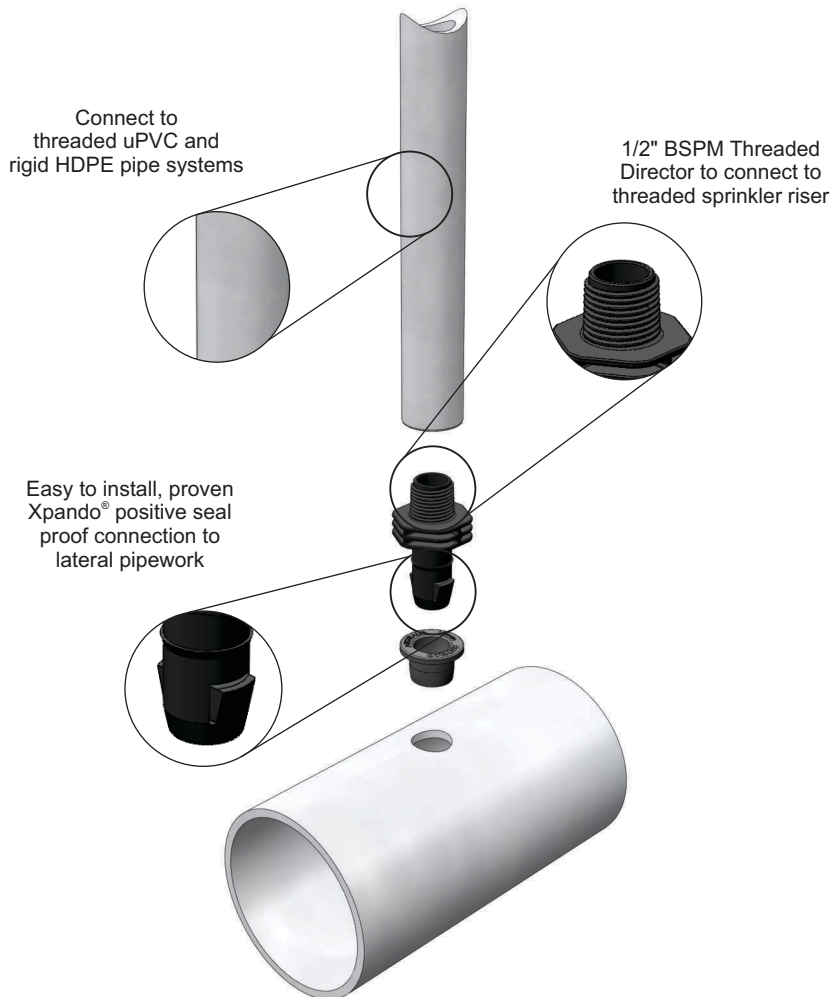

Xpando® Director	Min. ID	Min. Wall Thickness	Max. Wall Thickness	Capo® Grommet	Hole Size Grommet
Xpando® Director 19 mm	50 mm	1.5 mm	6.0 mm	19 mm	22 mm