

# CETA<sup>®</sup> Pressure Compensating Dripper



A take apart pressure compensating dripper incorporating a turbulent flow path and diaphragm for uniform flow rates over a wide range of operating pressures.

## Features

- Low manufacturing coefficient of variation (Cv) provides high performance (conforms to ISO 9261).
- Three colour coded flow rates: 2 lph (Red), 4 lph (Black) & 8 lph (Green).
- Self-flushing cleaning action at low pressures.
- Large clog resistant turbulent flow path.
- The CETA<sup>®</sup> dripper is able to be taken apart for inspection and cleaning.
- Anti-insect baffle to deter insect entry.
- Constructed of high quality UV, chemical & fertiliser resistant materials.

## Applications

Vineyards, orchards, row crops and landscape.

## Performance Chart

Pressure (kPa)	Flow (lph)		
	2 lph	4 lph	8 lph
50	1.9	3.3	6.2
100	2.0	3.8	7.9
150	2.2	4.2	7.9
200	2.3	4.4	8.1
250	2.3	4.4	8.1
300	2.3	4.4	8.0
350	2.2	4.3	7.8
<b>MINIMUM FLOW PATH DIMENSION (mm)</b>			
	0.7 x 0.6	0.8 x 0.8	1.2 x 0.9



CETA<sup>®</sup> PC  
2 lph  
Barb 4 mm




CETA<sup>®</sup> PC  
4 lph  
Barb 4 mm



CETA<sup>®</sup> PC  
8 lph  
Barb 4 mm

## Flow Rate

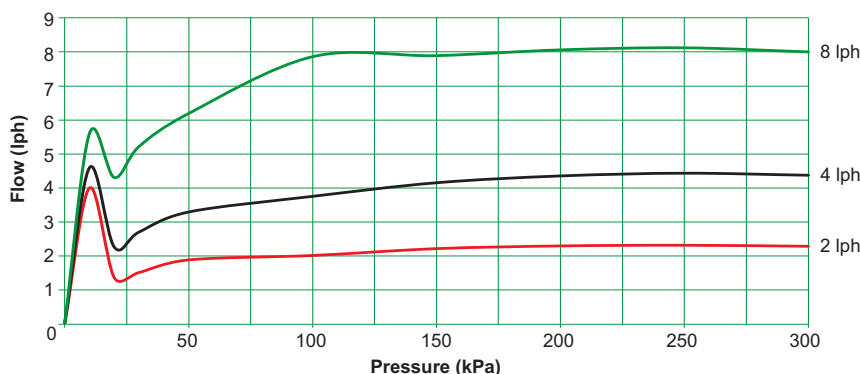

## Ordering Information - CETA<sup>®</sup> PC Barb

Flow	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
2 lph <b>Red</b> Base	<b>30425</b>	100	70	13.3
4 lph <b>Black</b> Base	<b>30445</b>	100	70	13.3
8 lph <b>Green</b> Base	<b>30485</b>	100	70	13.3

## Specifications

Dimensions Assembled		CETA <sup>®</sup> PC
HEIGHT		25 mm
WIDTH		20 mm
DEPTH		16 mm
WEIGHT (approx.)		1.7 g
UV STABILISED MATERIAL	BASE	polypropylene
	CAP	polypropylene
	DIAPHRAGM	silicone rubber
CONNECTION TYPE:	INLET	barb 4 mm
	OUTLET	spout 4 mm