



# Rotor Rain® Plus Pressure Compensating



The Rotor Rain® Plus Pressure Compensating sprinkler provides a consistent performance over longer rows and on undulating terrain, delivering a more even application of water, fertilisers and chemicals through each sprinkler. Rotor Rain® Plus PC provides a more even sprinkler performance for all sprinkler on the same lateral line.

**Features**

- Pressure Compensating for fixed outlet flows.
- Profiled double frame to maximise distribution uniformity.
- Snap off deflector option for young trees.
- Suspension hole for trellis applications
- Colour coded bases for easy flow rate identification.
- Easily disassembled for in-field maintenance.
- High grade silicone diaphragm for long service life.

**Applications**

Orchards and row crops where input pressure varies or terrain is undulating.

SPRINKLERS


**Ordering Information - Rotor Rain® Plus PC 3/8" Male Thread**

| Nozzle Size & Colour | Order Code Standard Spinner | Order Code w/Deflector Spinner | Pack Quantity | Packs per Carton | Carton (kg) |
|----------------------|-----------------------------|--------------------------------|---------------|------------------|-------------|
| 0.8 mm Brown         | 32215                       | 32315                          | 50            | 20               | 11.7        |
| 0.9 mm Dark Blue     | 32225                       | 32325                          | 50            | 20               | 11.7        |
| 1.1 mm Grey          | 32235                       | 32335                          | 50            | 20               | 11.7        |
| 1.2 mm Black         | 32245                       | 32345                          | 50            | 20               | 11.7        |
| 1.4 mm Orange        | 32255                       | 32355                          | 50            | 20               | 11.7        |
| 1.6 mm Red           | 32265                       | 32365                          | 50            | 20               | 11.7        |
| 1.8 mm Light Blue    | 32275                       | -                              | 50            | 20               | 11.7        |
| 2.0 mm Yellow        | 32285                       | -                              | 50            | 20               | 11.7        |
| 2.3 mm Purple        | 32295                       | -                              | 50            | 20               | 11.7        |
| 2.5 mm Olive         | 32305                       | -                              | 50            | 20               | 11.7        |



Rotor Rain® Plus PC 3/8" Male Thread

**Flow Rate**

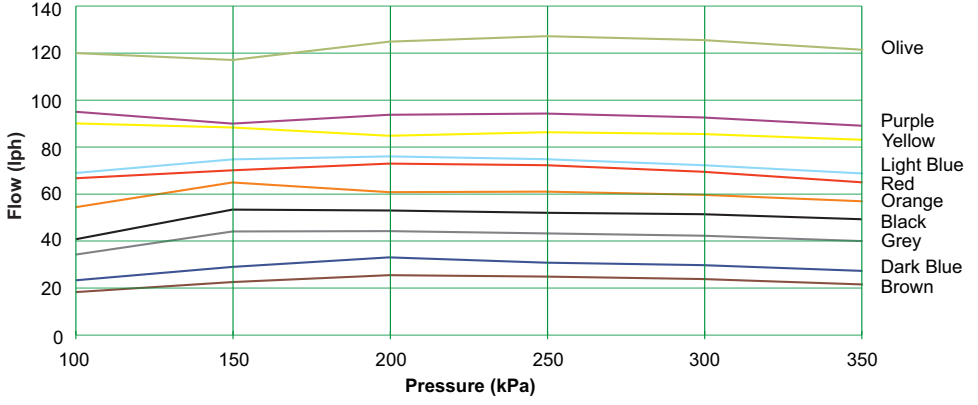

Rotor Rain® Plus PC with Deflector 3/8" Male Thread

**Specifications**

| Dimensions Assembled        |           | Rotor Rain® Plus 3/8" |
|-----------------------------|-----------|-----------------------|
| HEIGHT                      |           | 53 mm                 |
| WIDTH                       |           | 46 mm                 |
| DEPTH                       |           | 21 mm                 |
| WEIGHT (approx.)            |           | 11.0 g                |
| UV STABILIZED MATERIALS     | FRAME     | acetal                |
|                             | SPINNER   | nylon                 |
|                             | NOZZLE    | acetal                |
|                             | DIAPHRAGM | silicone rubber       |
| BASE/CONNECTION TYPE: INLET |           | thread 3/8" BSPM      |

**NEW**



Rotor Stake™ Range

- 5mm - Code: **40555**
- 10mm - Code: **40515**
- 13mm - Code: **40535**

*\*Refer to page 54 for stake information*

## Ordering Information - Rotor Rain® Plus Assembly w/ 600 mm Tube & Adaptor

| Nozzle Size & Colour                         | Order Code   | Pack Quantity | Packs per Carton | Carton (kg) |
|--|--------------|---------------|------------------|-------------|
| 0.8 mm <b>Brown</b> - Standard Spinner       | <b>32415</b> | 10            | 8                | 5.3         |
| 0.9 mm <b>Dark Blue</b> - Standard Spinner   | <b>32425</b> | 10            | 8                | 5.3         |
| 1.1 mm <b>Grey</b> - Standard Spinner        | <b>32435</b> | 10            | 8                | 5.3         |
| 1.2 mm <b>Black</b> - Standard Spinner       | <b>32445</b> | 10            | 8                | 5.3         |
| 1.4 mm <b>Orange</b> - Standard Spinner      | <b>32455</b> | 10            | 8                | 5.3         |
| 1.6 mm <b>Red</b> - Standard Spinner         | <b>32465</b> | 10            | 8                | 5.3         |
| 1.8 mm <b>Light Blue</b> - Standard Spinner  | <b>32475</b> | 10            | 8                | 5.3         |
| 2.0 mm <b>Yellow</b> - Standard Spinner      | <b>32485</b> | 10            | 8                | 5.3         |
| 2.3 mm <b>Purple</b> - Standard Spinner      | <b>32495</b> | 10            | 8                | 5.3         |
| 2.5 mm <b>Olive</b> - Standard Spinner       | <b>32505</b> | 10            | 8                | 5.3         |
| 0.8 mm <b>Brown</b> w/ Deflector Spinner     | <b>32515</b> | 10            | 8                | 5.7         |
| 0.9 mm <b>Dark Blue</b> w/ Deflector Spinner | <b>32525</b> | 10            | 8                | 5.7         |
| 1.1 mm <b>Grey</b> w/ Deflector Spinner      | <b>32535</b> | 10            | 8                | 5.7         |
| 1.2 mm <b>Black</b> w/ Deflector Spinner     | <b>32545</b> | 10            | 8                | 5.7         |
| 1.4 mm <b>Orange</b> w/ Deflector Spinner    | <b>32555</b> | 10            | 8                | 5.7         |

Rotor Rain® Plus PC Assembly with 600 mm Tube & Adaptor



**NEW**

Socket Driver for Rotor Rain® Plus  
\*Refer to page 59 for Socket Driver information

