

**NEW**

# Xpando® Director



## NEW PRODUCT RELEASE

A new addition to the already successful Xpando® Take-Off range, this Take-Off Director is ideal for connecting threaded sprinkler risers to rigid sprinkler lateral pipework.

### Instructions

Simply drill a hole in the sprinkler lateral with the Xpando® Drill Bit, insert the Capo® Rubber Grommet, screw the Xpando Director® into the riser and then insert into the Capo® Rubber Grommet.



Xpando® Director  
1/2" BSPM x 19 mm Take-Off



Capo® Rubber Grommet 19 mm




22 mm Drill Bit for 19 mm Xpando®

Can connect to most threaded uPVC and rigid HDPE pipe systems

Easy to install, proven Xpando® positive seal proof connection to lateral pipework

1/2" BSPM Threaded Director to connect to threaded sprinkler riser

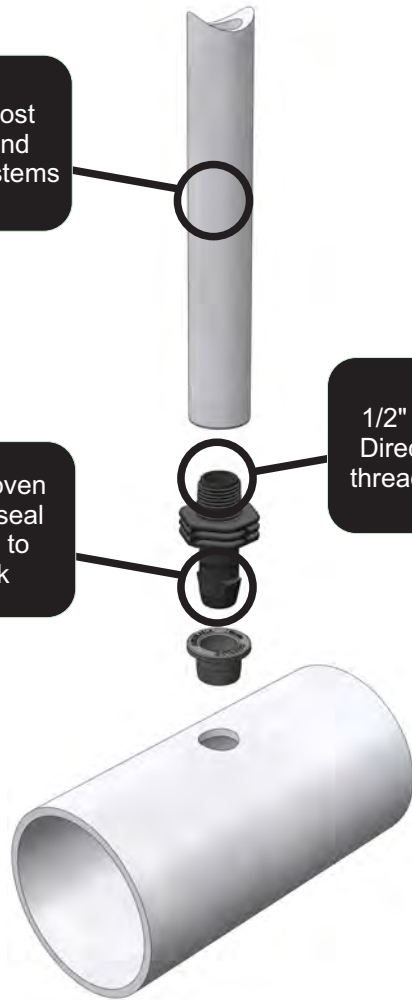

### Ordering Information - Xpando® Director

Type	Order Code	Pack Quantity	Packs per Carton	Carton (kg)
Xpando® Director 1/2" BSPM x 19 mm Take-Off	45985	25	20	10.1
Capo® Rubber Grommet 19 mm	45755	100	18	10.4
22 mm Drill Bit for 19 mm Xpando®	51865	1	36	TBA

Xpando® Director	Nom. Pipe Size (min. ID)	Min. Wall Thickness	Max. Wall Thickness	Capo® Grommet	Hole Size Grommet
Xpando® Director 19 mm	50 mm	1.5 mm	6.0 mm	19 mm	22 mm

FITTINGS