

Putting Water Where it Counts![®]



Xpando[®] Take-Off Fittings

Made in Australia

antelco.com

Xpando[®] Take-Off Fittings

Antelco Xpando[®] Take-Off Adaptors are a proven method of connecting low pressure irrigation tubes and drip lines from HDPE and uPVC pipes and sub mains with a Capo[®] Grommet.

Features


- Easy installation saves time and costs.
- Innovative Xpando[®] Take-Off Adaptor with collapsible barb prevents pullout and reduces grommet damage during the installation process.
- Capo[®] Grommet with internal step combines with Xpando[®] interference barb to hold off-take firmly in place.
- UV stabilised materials for long life.
- Use precision Xpando[®] Drill Bits to create clean round holes of the correct size to ensure reliable sealing.



Applications

Agricultural, horticultural, vineyard and landscape applications.

Interference between inlet barb and grommet causes grommet to expand and seal creating a reliable connection

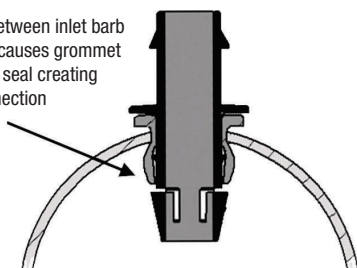

Ordering Information - Xpando[®] Take-Off Adaptors







Type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
Xpando [®] 10 mm inlet x 13 mm Take-Off	45715	25	65	8.9
Xpando [®] 10 mm inlet x 14 mm Take-Off (16 OD)	45875	25	65	9.8
Xpando [®] 10 mm inlet x 15 mm Take-Off (17 OD)	45885	25	56	9.2
Xpando [®] 13 mm inlet x 13 mm Take-Off	45605	25	60	8.7
Xpando [®] 13 mm inlet x 14 mm Take-Off (16 OD)	45595	25	60	9.6
Xpando [®] 13 mm inlet x 15 mm Take-Off (17 OD)	45615	25	48	8.2
Xpando [®] 16 mm inlet x 16 mm Take-Off (18 OD)	45635	25	35	8.8
Xpando [®] 16 mm inlet x 18 mm Take-Off (20 OD)	45585	25	32	8.3
Xpando [®] 19 mm inlet x 18 mm Take-Off (20 OD)	45995	25	26	8.4
Xpando [®] 19 mm inlet x 19 mm Take-Off	45665	25	26	9.0
Xpando [®] 19 mm inlet x 21 mm Take-Off (23 OD)	45675	25	24	9.3
Xpando [®] 19 mm inlet x 25 mm Take-Off (27 OD)	45685	25	18	8.0

Ordering Information - Capo[®] Rubber Grommets

Type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
Capo [®] Rubber Grommet 10 mm	45725	100	40	12.7
Capo [®] Rubber Grommet 13 mm	45735	100	40	10.5
Capo [®] Rubber Grommet 16 mm	45745	100	24	10.8
Capo [®] Rubber Grommet 19 mm	45755	100	18	10.4

Ordering Information - Xpando[®] Drill Bits

Type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
14 mm Drill Bit for 10 mm Xpando [®]	51835	1	36	1.8
16 mm Drill Bit for 13 mm Xpando [®]	51845	1	36	2.2
19 mm Drill Bit for 16 mm Xpando [®]	51855	1	36	2.7
22 mm Drill Bit for 19 mm Xpando [®]	51865	1	36	3.6

Xpando [®] Take -Off Adaptor	Min. ID	Min. Wall Thickness	Max. Wall Thickness	Capo [®] Grommet	Hole Size Drill Bit
					
Xpando [®] 10 mm x 13 mm	25 mm	1.5 mm	3.6 mm	10 mm (curved)	14 mm
Xpando [®] 10 mm x 14 mm					
Xpando [®] 10 mm x 15 mm					
Xpando [®] 13 mm x 13 mm	40 mm	1.5 mm	2.3 mm	13 mm	16 mm
Xpando [®] 13 mm x 14 mm					
Xpando [®] 13 mm x 15 mm					
Xpando [®] 16 mm x 16 mm	50 mm	1.5 mm	3.6 mm	16 mm	19 mm
Xpando [®] 16 mm x 18 mm					
Xpando [®] 19 mm x 18 mm	50 mm	1.5 mm	6.0 mm	19 mm	22 mm
Xpando [®] 19 mm x 19 mm					
Xpando [®] 19 mm x 21 mm					
Xpando [®] 19 mm x 25 mm					



Xpando[®] Take-Off Adaptor



Capo[®] Rubber Grommet



Drill Bit for Xpando[®]