

Putting Water Where it Counts!®



Mini Bubbler Adjustable Flow

antelco.com

Mini Bubbler Adjustable Flow

High volume output with gentle umbrella pattern. Flow and coverage can be altered by rotating the click indexed cap.

Features

- Fingertip flow control with shut-off option.
- Spike model to anchor Mini Bubbler at the plant.
- Barb model for direct attachment to micro supply tubing.
- 10-32 UNF threaded model for installation into Rigid Risers and Asta® Stakes.
- 1/2" threaded model for riser pipe installations.



Mini Bubbler Spike inlet 0.16" w/ Break Off Adapter

Mini Bubbler Barb 0.16"


Mini Bubbler Thread 10-32 UNF

Mini Bubbler Thread 1/2" Female

Performance Chart - Fully open (approx. 22 clicks)

Pattern		360° ●
Pressure (psi)	Flow (gph)	Diameter (ft)
15	27.0	0.69
20	30.1	1.05
30	35.0	1.89

Flow rate

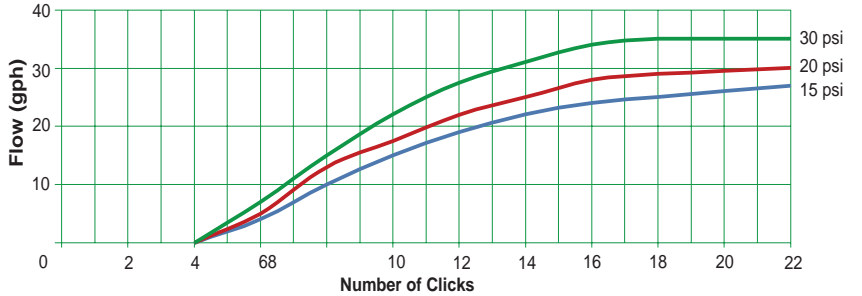

Ordering Information - Mini Bubbler

Base type	Part Number	Pack Quantity	Packs Per Carton	Carton (lbs)
Barb 0.16"	31745	100	50	19.6
Thread 10-32 UNF	31715	100	50	24.0
Thread 1/2" FNPT	31725	25	50	13.7
Spike	31795	25	40	14.7

Specifications

	Barb	Thread	Thread 1/2"	Spike
UV STABILIZED BASE MATERIAL	polypropylene	acetal	polypropylene	polypropylene
BASE/CONNECTION TYPE: INLET	barb 0.16"	thread 10-32 UNF	thread 1/2" FNPT	barb 0.16"



Scan to see how it works

Applications

Street trees and shrubs. Higher flow rates allow for short watering times.