

CFd™ Downspray



The patented CFd™ Downspray is a 360° spray jet that distributes water evenly across the wetted surface area. Stake assembly options provide savings in labor and installation time.

Features

- 45° downspray reduces the effect of wind.
- Gentle spray pattern minimizes damage to delicate plant foliage.
- Galvanized wire stake assembly with 36" tubing incorporates shut-off clip to stop flow.
- Six color coded frames to identify flow rates.
- "Quick" thread for easy insertion into tubing.
- Patented (US patent 8480013) design provides uniform water application.
- UV stabilized materials for long life.

Applications


Nurseries, tree lots, potted plants, home and landscaped gardens.

Performance Chart

Pattern		360°		
Nozzle Size & Color	Tested at 8" above ground level			
	Pressure (psi)	Flow (gph)	Diameter (in)	
0.030" Black	10	4.8	24	
	15	6.0	24	
	20	7.0	20	
0.035" Brown	10	6.0	24	
	15	7.5	20	
	20	8.6	20	
0.040" Blue	10	7.0	24	
	15	8.9	20	
	20	10.5	20	
0.045" Gray	10	9.6	24	
	15	11.8	20	
	20	13.7	20	
0.060" Red	10	15.8	24	
	15	19.6	20	
	20	22.7	20	
0.082" Purple	10	28.3	24	
	15	35.1	24	
	20	40.9	22	



CFd™ Downspray Range

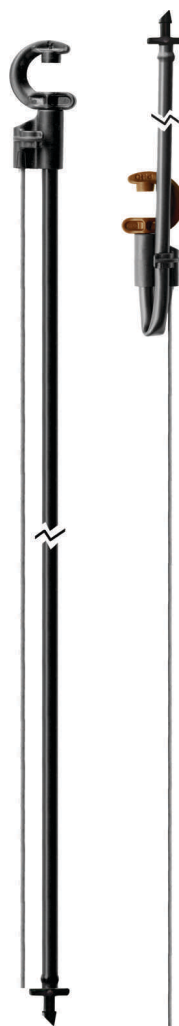

CFd™ Downspray Wire Stake Assembly with flow shut-off



Ordering Information - CFd™ Downspray

Color & Orifice Size	Part Number	Pack Quantity	Packs per Carton	Carton (lbs)
0.030" Black	19005	100	50	18.1
0.035" Brown	19025	100	50	18.1
0.040" Blue	19015	100	50	18.1
0.045" Gray	19045	100	50	18.1
0.060" Red	19055	100	50	18.1
0.082" Purple	19065	100	50	18.1

Ordering Information - CFd™ Galvanized Wire Stake Assembly w/Shut-Off Clip

Color & Orifice Size	Tube Length	Part Number	Pack Quantity	Packs per Carton	Carton (lbs)
0.030" Black	36"	54305	25	12	20.1
0.035" Brown	36"	54325	25	12	20.1
0.039" Blue	36"	54315	25	12	20.1
0.045" Gray	36"	54405	25	12	20.1
0.060" Red	36"	54415	25	12	20.1
0.082" Purple	36"	54425	25	12	20.1