

Putting Water Where it Counts![®]



CETA[®]

Pressure Compensating Emitter

Made in Australia

antelco.com

CETA® Pressure Compensating Emitter

A take apart pressure compensating dripper incorporating a turbulent flow path and diaphragm for uniform flow rates over a wide range of operating pressures.

Features

- Take apart for easy inspection and cleaning.
- Self-flushing action at low pressure.
- Anti-insect baffle to reduce risk of blockages.
- Spike & In-Line Spike models to anchor CETA® at the plant root.
- 4 mm barbed inlet dripper with colour coded bases.
- Constructed of high quality UV, chemical & fertiliser resistant materials.
- Low manufacturing coefficient of variation (Cv) provides high performance (conforms to ISO 9261).



CETA® PC Spike
Inlet/Outlet 4 mm


CETA® PC In-Line Spike
Inlet/Outlet 4 mm



Applications

Pots, planter boxes, balcony, patios and landscape.

Flow Rate

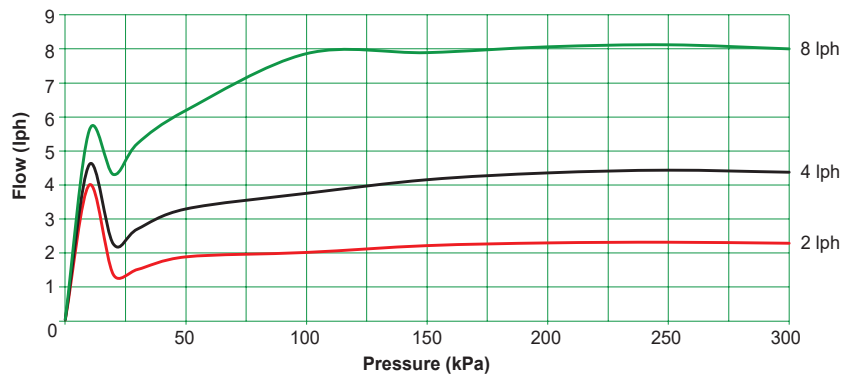

Specifications

		CETA® PC Barbed Outlet	CETA® PC Spike, In-Line Spike, Spout Outlet
UV STABILISED MATERIAL	BASE/SPIKE CAP DIAPHRAGM ADAPTOR	polypropylene polypropylene silicone rubber acetal	polypropylene polypropylene silicone rubber
CONNECTION TYPE:	INLET OUTLET	barb 4 mm barb 3 mm or 4 mm	barb 4 mm spout 4 mm

Performance Chart

Pressure (kPa)	Flow (lph)		
	2 lph	4 lph	8 lph
50	1.9	3.3	6.2
100	2.0	3.8	7.9
150	2.2	4.2	7.9
200	2.3	4.4	8.1
250	2.3	4.4	8.1
300	2.3	4.4	8.0
350	2.2	4.3	7.8
MINIMUM FLOW PATH DIMENSION (MM)	0.7 x 0.6	0.8 x 0.8	1.2 x 0.9



Ordering Information - CETA® PC Spike

Description	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
Spike 2 lph	30615	25	60	9.0
Spike 4 lph	30625	25	60	9.0
Spike 8 lph	30635	25	60	9.0
In-Line Spike 2 lph	30645	25	50	7.7
In-Line Spike 4 lph	30655	25	50	7.7
In-Line Spike 8 lph	30665	25	50	7.7

NEW

NEW

NEW

NEW

CETA® PC 2 lph



Spout Outlet

Barbed Outlet

Ordering Information - CETA® PC Spout Outlet

Description	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
2 lph Red Base	30425	100	70	13.3
4 lph Black Base	30445	100	70	13.3
8 lph Green Base	30485	100	70	13.3

CETA® PC 4 lph



Spout Outlet

Barbed Outlet

Ordering Information - CETA® PC Barbed Outlet

Description	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
2 lph Red Base w/ 3 mm Barbed Outlet	30515	100	60	13.5
4 lph Black Base w/ 3 mm Barbed Outlet	30525	100	60	13.5
8 lph Green Base w/ 3 mm Barbed Outlet	30535	100	60	13.5
2 lph Red Base w/ 4 mm Barbed Outlet	30545	100	60	13.5
4 lph Black Base w/ 4 mm Barbed Outlet	30555	100	60	13.5
8 lph Green Base w/ 4 mm Barbed Outlet	30565	100	60	13.5

NEW

NEW

NEW

CETA® PC 8 lph



Spout Outlet

Barbed Outlet

Ordering Information - Locating Drip Spike **NEW**

Type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
Locating Drip Stake (suits 3mm/4mm tube)	43605	25	TBA	TBA

Antelco Group of Companies

LINCOLN
— Est. 1959 —
MOULDING THE FUTURE

ANTELCO®

Dawn



Antelco Australia
Antelco Pty Ltd ABN 50 008 062 708
Sales & Marketing,
Orders & Warehouse
Research & Development
PO Box 95, 131 Tolley Rd,
St Agnes SA 5097 Australia
+61 8 8334 4333
adelaide@antelco.com.au

Antelco USA
Antelco Corporation
Sales & Marketing,
Orders & Warehouse
886 Waterway Pl,
Longwood,
Florida 32750 USA
+1 407 331 0699
info@antelco.com

Antelco Europe
Antelco UK Limited
Sales & Marketing,
Orders & Warehouse
17a Chartmoor Rd,
Leighton Buzzard,
Bedfordshire LU7 4WG UK
+44 152 585 9990
orders@antelco.co.uk